


1 Lighting Design Related Detail Sketches







Size:1000x15mm



3 Description

- •High efficiency, low energy consumption.
- Good quality beam.
- •Long life span 25000 hours.
- •Ecological. The waste can be recycled.No pollution and mercury.





PRODUCT SPECIFICATION

Dimension:	13*5. 5±0. 5mm
LED package:	2835
LED quantity:	180PCS
Beam angle:	≥110°
Color temperature:	3000К/6500К
CRI:	≥70
Lifetime:	25,000 hours
Operating temp:	Ta=-25 to 40°C (Tc max=70°C)
IP Rating:	IP65


PERFORMANCE DATA

. .


Power consumption:	10.5W
Frequency range:	50Hz/60Hz
Supply voltage:	AC220-240V
Output current:	38mA
Power factor:	>0.9
Luminous flux:	670





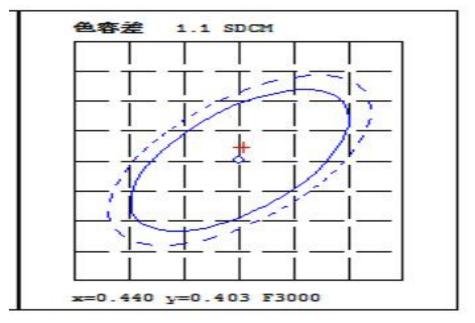


Color Consistency - Initial

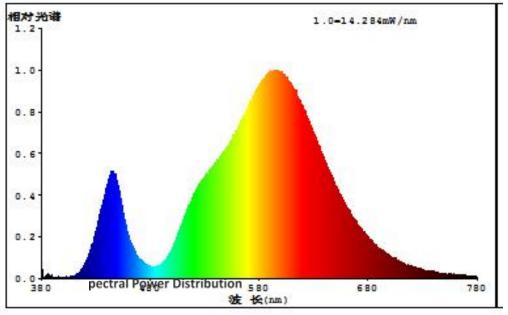




Color Information

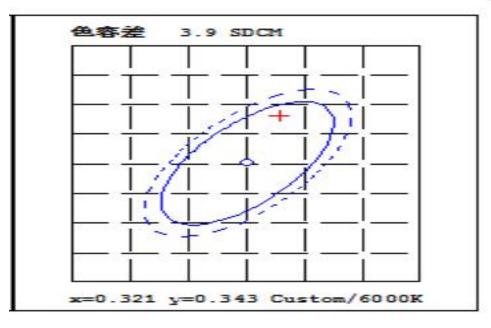



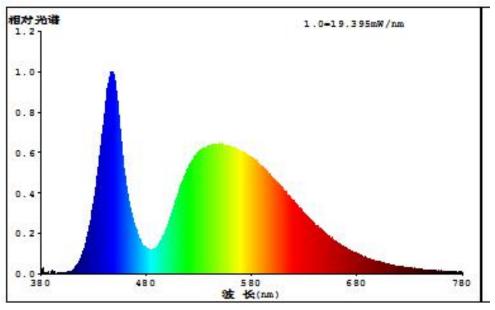

-

pectral Power Distribution





- 1. Find the strip light cutting place and cut it with the scissors
- 2. Install the pins and dock with the power adapter
- 3. Installation tail plug
- 4. Mounting clip fastening.



1. Do not attempt to install or use a fixture until you read and understand the installation instructions and safety label.

2.Fixtures have line voltage risk of shock and no user serviceable parts.Do not attempt to open them.

3.Do not hot swap fixtures.Ensure that power to the series is off before connecting or disconnecting individual fixtures.

4.Do not use a fixture if the lens, housing, or power cables are damaged.

5.Do not use a fixture for any voltage for which it is not rated.Do not exceed the specified voltage and current input for any fixture.

6.Do not use the eye to see the light source directly.