



PRODUCT SPECIFICATION

Product Name: LED Down Light

Product model: NSDL-15-65K NSDL-15-40K

DESCRIPTION : LED Down Light



● Features

1. Using die-casting aluminum with good appearance for high class looking.
2. Built-in constant current driver for high efficiency and stability.
3. Adopt imported COB as light source with high light efficiency and long lifespan.
4. Quick response time, the LED response time is nanosecond.
5. Environmental protection, no heavy metals and harmful gas.
6. Energy-saving, can save energy more 80% than traditional lights.
7. No flicker, start quickly, soft light, protect your eyes.
8. Easy to install and use.


● Technical Parameter

Model	NSDL-15
LED model	COB 1917
LED Qty	1 PCS
Power	15 W
Voltage	AC110-240 V


Working Frequency	50/60HZ
Power Efficiency	≥ 83%
Luminous Flux	1500LM
Efficiency	100LM/W ± 10%
Power Factor	≥ 0.9
Colour Temperature	WH : 6500K(6020-7040) NW: 4000K(3710-4260)
CRI	Ra ≥ 80
Beam Angle	100°
Working Temperature	-20 to + 50 °C
Service life	30,000hr life 5yr warranty

● Relative Spectral Energy Distribution

NSDL-15-65K

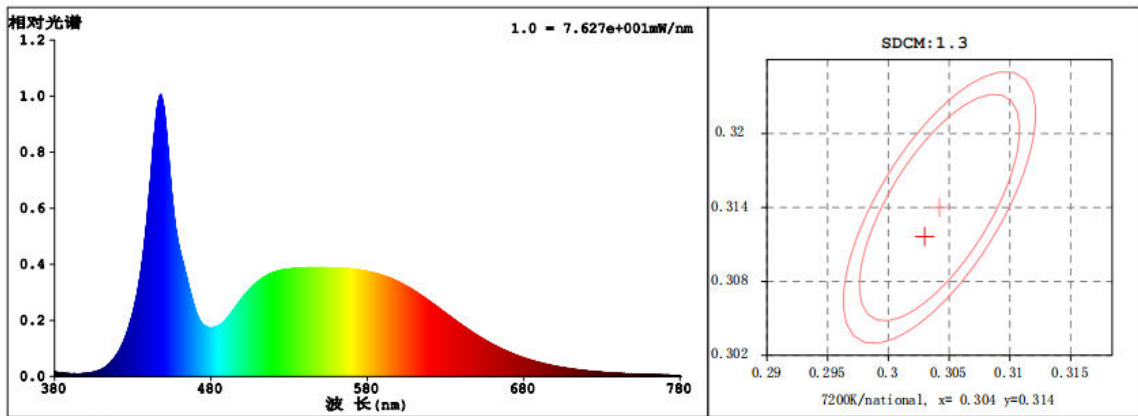



NSDL-15-40K

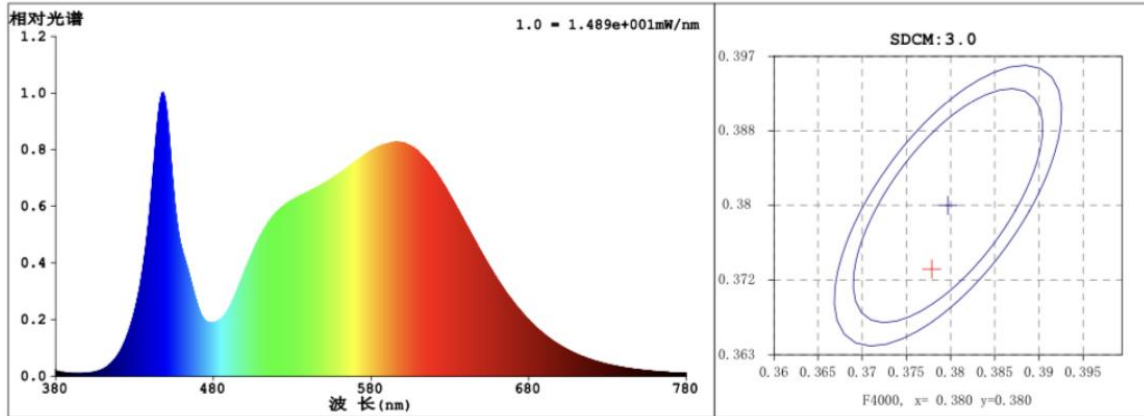


● Optical characteristic curve


NSDL-15

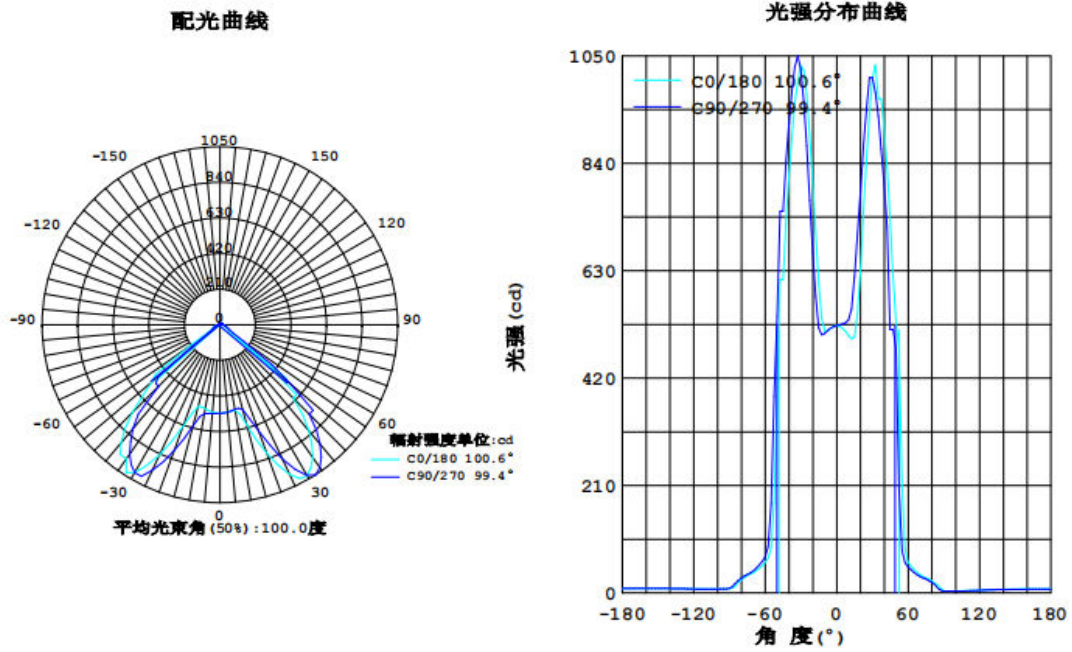

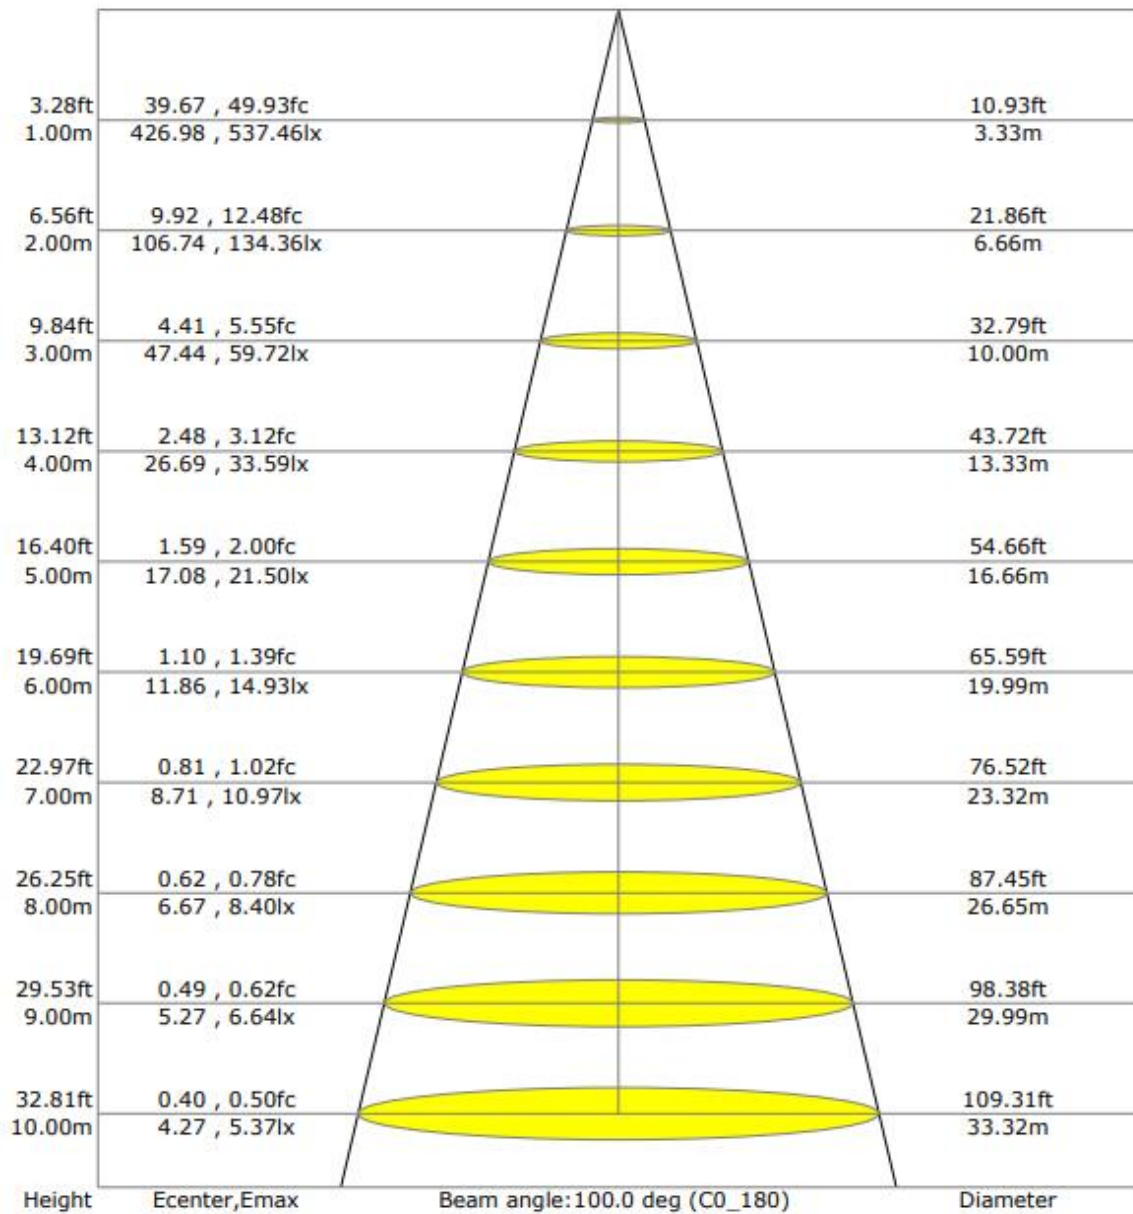

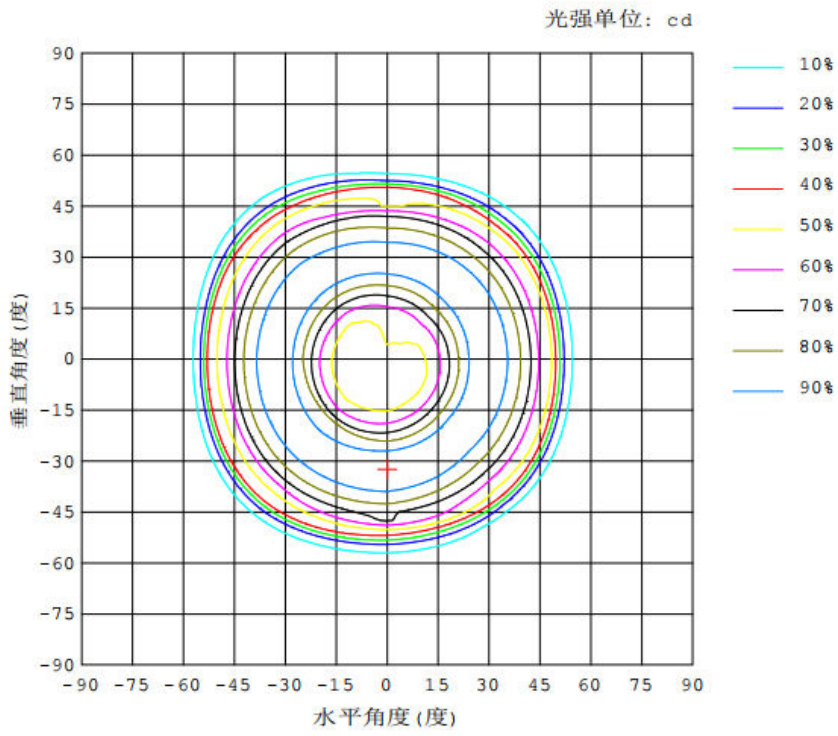


● Dimensions

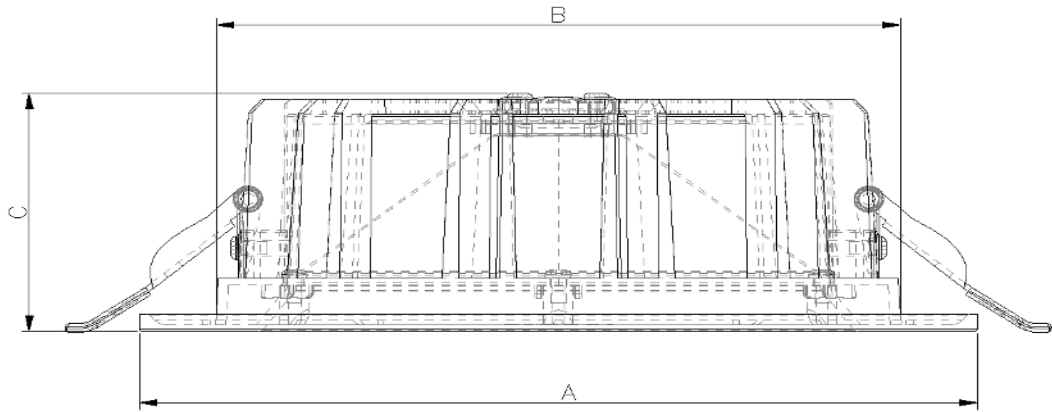


Model	Diameter (mm)	A(mm)	B(mm)	C(mm)
20W	/	170±1	140±1	55±1

● Instruction of wiring

1. Diagram of power supply wiring :

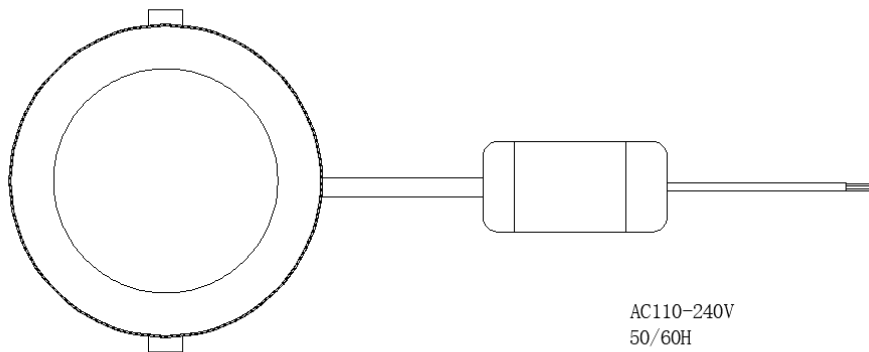

● Installation Instructions

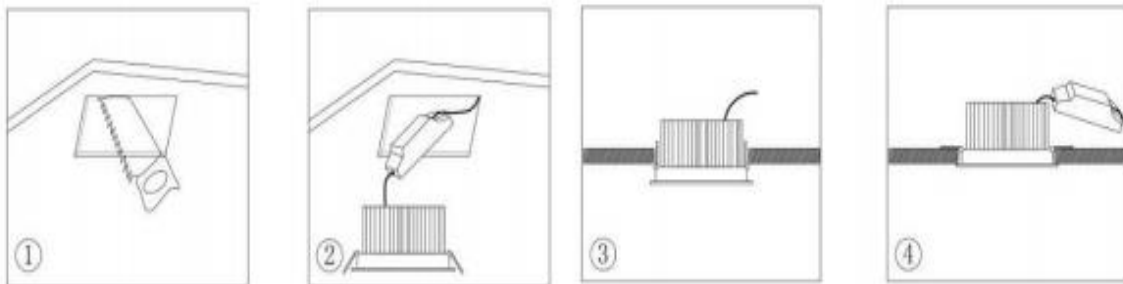

1. Make a hole of the right size in the ceiling;
2. Connect power and lamp;
3. Attach the spring-loaded lamp to the ceiling;
4. Finish installation and put the power on.

● Product Package

Packed in color box,20 PCS/ case

● Product Photo



● Packing size & Pictures:

Model	L (mm)	W (mm)	H (mm)
NSDL-15-65K	180	180	61
NSDL-15-40K	180	180	61











01.02.13.071.5435
 内盒/180x180x61mm/250g灰底白+A2(100g芯) E坑/四色/覆光膜/NSDL-15-40K-V2


01.02.13.041.3751

外箱/380x320x375mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NSDL-15-65K-V1

<p>NASCO GLOBAL ناسكو العالمية LED DOWN LIGHT</p>	<p>NASCO GLOBAL ناسكو العالمية LED DOWN LIGHT</p>	<p>NASCO GLOBAL ناسكو العالمية LED DOWN LIGHT</p>	<p>NASCO GLOBAL ناسكو العالمية LED DOWN LIGHT</p>																																																
<p>NASCO GLOBAL ناسكو العالمية</p>  <p>حياة من نور... Life with Light...</p>  <p>الرقم المبرمج: 92 000 30 46 www.nasco-global.com</p> <p>15W LED DOWN LIGHT</p>	<p>5 YEARS Warranty ضمان 5 سنوات</p> <table border="1"> <tr><td>رقم الموديل</td><td>MODEL NO</td><td>NSDL-15-40K</td></tr> <tr><td>الجهد</td><td>VOLTAGE</td><td>AC 110-240V</td></tr> <tr><td>القدرة</td><td>POWER</td><td>15W</td></tr> <tr><td>التردد</td><td>FREQUENCY</td><td>50/60Hz</td></tr> <tr><td>التيار</td><td>CURRENT</td><td>0.07A</td></tr> <tr><td>التيار القصوى</td><td>MAX.CURRENT</td><td>0.15A</td></tr> <tr><td>القدرة القصوى</td><td>MAX.POWER</td><td>18W</td></tr> <tr><td>الوقت الافتراضي</td><td>LIFE TIME</td><td>30,000Hours</td></tr> </table>  <p>MADE IN CHINA صنع في الصين</p>	رقم الموديل	MODEL NO	NSDL-15-40K	الجهد	VOLTAGE	AC 110-240V	القدرة	POWER	15W	التردد	FREQUENCY	50/60Hz	التيار	CURRENT	0.07A	التيار القصوى	MAX.CURRENT	0.15A	القدرة القصوى	MAX.POWER	18W	الوقت الافتراضي	LIFE TIME	30,000Hours	<p>NASCO GLOBAL ناسكو العالمية</p>  <p>حياة من نور... Life with Light...</p>  <p>الرقم المبرمج: 92 000 30 46 www.nasco-global.com</p> <p>15W LED DOWN LIGHT</p>	<p>5 YEARS Warranty ضمان 5 سنوات</p> <table border="1"> <tr><td>رقم الموديل</td><td>MODEL NO</td><td>NSDL-15-65K</td></tr> <tr><td>الجهد</td><td>VOLTAGE</td><td>AC 110-240V</td></tr> <tr><td>القدرة</td><td>POWER</td><td>15W</td></tr> <tr><td>التردد</td><td>FREQUENCY</td><td>50/60Hz</td></tr> <tr><td>التيار</td><td>CURRENT</td><td>0.07A</td></tr> <tr><td>التيار القصوى</td><td>MAX.CURRENT</td><td>0.15A</td></tr> <tr><td>القدرة القصوى</td><td>MAX.POWER</td><td>18W</td></tr> <tr><td>الوقت الافتراضي</td><td>LIFE TIME</td><td>30,000Hours</td></tr> </table>  <p>MADE IN CHINA صنع في الصين</p>	رقم الموديل	MODEL NO	NSDL-15-65K	الجهد	VOLTAGE	AC 110-240V	القدرة	POWER	15W	التردد	FREQUENCY	50/60Hz	التيار	CURRENT	0.07A	التيار القصوى	MAX.CURRENT	0.15A	القدرة القصوى	MAX.POWER	18W	الوقت الافتراضي	LIFE TIME	30,000Hours
رقم الموديل	MODEL NO	NSDL-15-40K																																																	
الجهد	VOLTAGE	AC 110-240V																																																	
القدرة	POWER	15W																																																	
التردد	FREQUENCY	50/60Hz																																																	
التيار	CURRENT	0.07A																																																	
التيار القصوى	MAX.CURRENT	0.15A																																																	
القدرة القصوى	MAX.POWER	18W																																																	
الوقت الافتراضي	LIFE TIME	30,000Hours																																																	
رقم الموديل	MODEL NO	NSDL-15-65K																																																	
الجهد	VOLTAGE	AC 110-240V																																																	
القدرة	POWER	15W																																																	
التردد	FREQUENCY	50/60Hz																																																	
التيار	CURRENT	0.07A																																																	
التيار القصوى	MAX.CURRENT	0.15A																																																	
القدرة القصوى	MAX.POWER	18W																																																	
الوقت الافتراضي	LIFE TIME	30,000Hours																																																	
			<p>激活 Wi 转到“设置”</p>																																																

01.02.13.041.3750

外箱/380x320x375mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NSDL-15-40K-V1

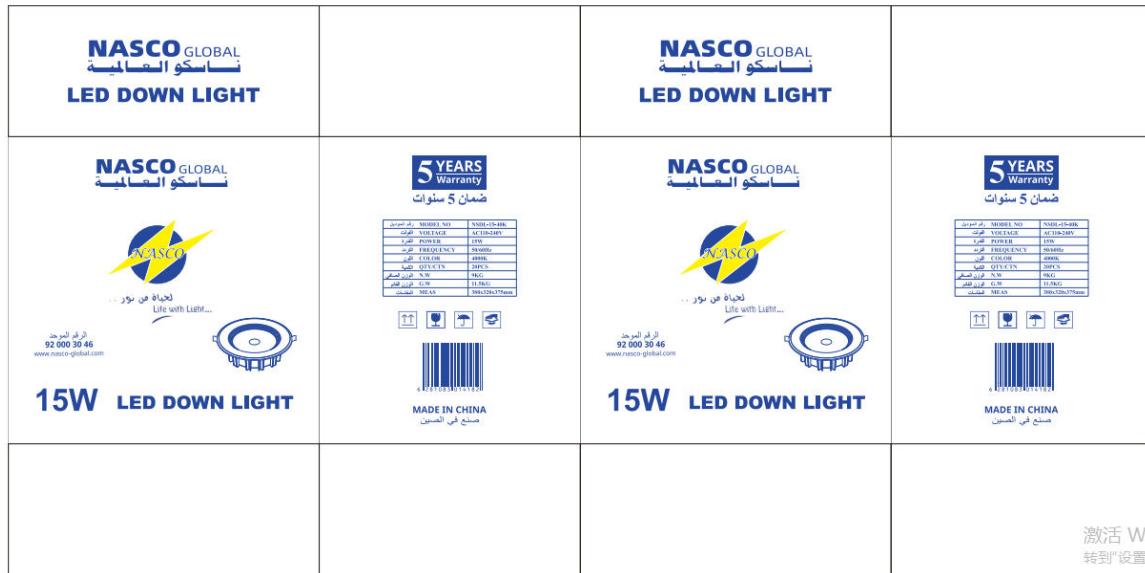

● Attentions

1. Make sure the power is off before maintenance.
2. Clean the glass of diffuser of lamp regularly to maintain good light transmittance.
3. Clean the dust of the shell to maintain good heat dissipation performance.
4. Be careful not to use water or corrosive solution for cleaning, it is better to use a dry cloth.

● Warranty and After-sales Service

The period of guarantee is 5 years. Quality assurance is based on the correct storage, installation, use and maintenance of products. Due to improper installation and improper use of the product, the product is damaged beyond the scope of this warranty. During the warranty period, We will choose to repair, replace (spare parts) with new products. Labor charges or material costs will be appropriately collected over the warranty period.

● Products Application Cases



The date listed in this file is for reference only, and the specific date should be subject to the specific products, if any change, sorry for no notice.