

PRODUCT SPECIFICATION

Product Name: LED Down Light

Product model: NSDL-20-65K NSDL-20-40K NSDL-20-30K

DESCRIPTION: LED Down Light (COB)

RoHS IECEE AC 110-240V Up to 30000hours

Features

- 1. Using die-casting aluminum with good appearance for high class looking.
- 2. Built-in constant current driver for high efficiency and stability.
- 3. Adopt imported COB as light source with high light efficiency and long lifespan.
- 4. Quick response time, the LED response time is nanosecond.
- 5. Environmental protection, no heavy metals and harmful gas.
- 6. Energy-saving, can save energy more 80% than traditional lights.
- 7. No flicker, start quickly, soft light, protect your eyes.
- 8. Easy to install and use.

Technical Parameter

Model	NSDL-20
LED model	COB 1917
LED Qty	1 PCS
Power	20 W
Voltage	AC110-240 V

Working Frequency 50/60HZ

Power Efficiency ≥ 83%

Luminous Flux 1800LM

Efficiency 90LM/W $\pm 10\%$

Power Factor ≥ 0.9

Colour Temperature WH: 6500K(6020-7040)

NW: 4000K(3710-4260)

WW: 3000K(2875-3215)

CRI Ra≥80

Bean Angle 100º


Working $-20 \text{ to} + 50 \,^{\circ}\text{C}$

Temperature


Service life 30,000hr life 5yr warranty

Relative Spectral Energy Distribution


NSDL-20-65K

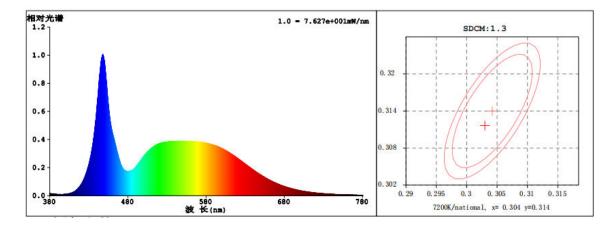

NSDL-20-40K

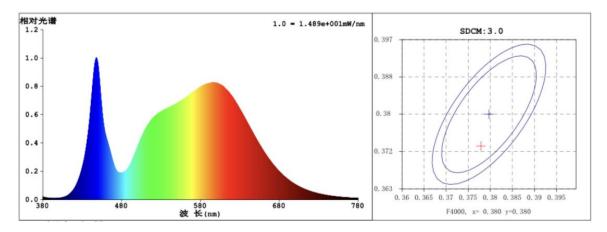



NSDL-20-30K

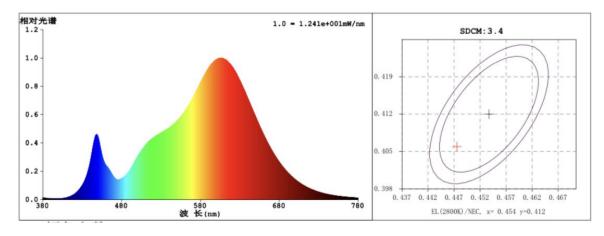


• Optical characteristic curve

NSDL-20

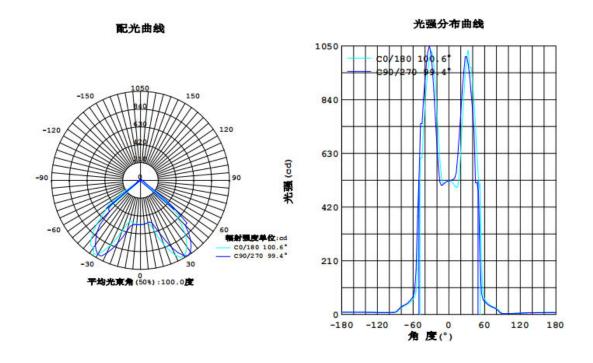


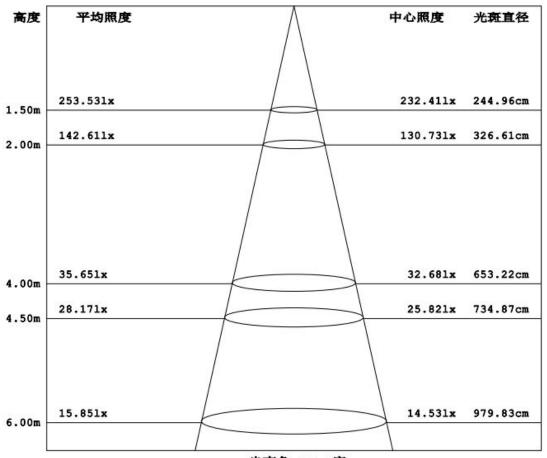

光東角:100.0度

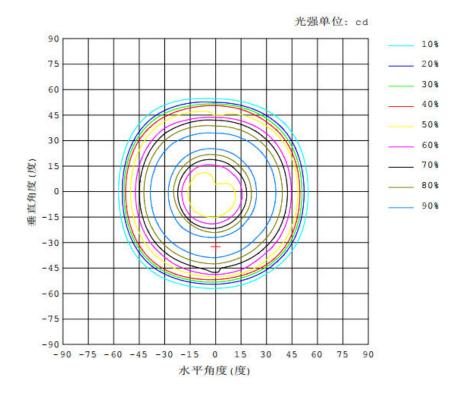


Dimensions

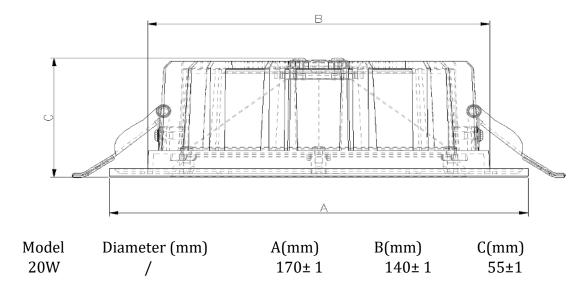


Instruction of wiring

1. Diagram of power supply wiring:

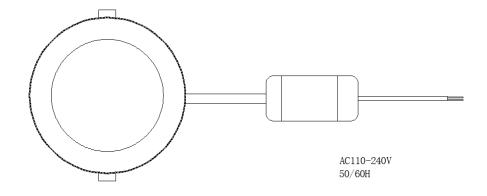

• Installation Instructions

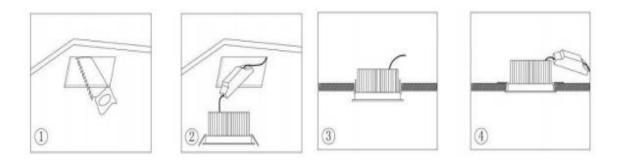

- 1. Fix the fixture with screw on ceiling;
- 2. Connect power and lamp;
- 3. Fix the lamp with fixture on ceiling by screw;
- 4. Finish installation and put the power on.

• Product Package

Packed in color box,20 PCS/ case

● Product Photo



• Packing size & Pictures:

Model	L (mm)	W (mm)	H (mm)
NSDL-20-65K	180	180	61
NSDL-20-40K	180	180	61
NSDL-20-30K	180	180	61





01.02.13.041.3754

外箱/380x320x375mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NSDL-20-65K-V1

NASCO GLOBAL نساسکو العمالیت LED DOWN LIGHT		NASCO GLOBAL ناسکو الصالیت LED DOWN LIGHT	
NASCO GLOBAL A JUNE OF STANK	SYEARS WITTARTY Call and So a	NASCO GLOBAL Little with Light 20W LED DOWN LIGHT	SYEARS WHITCHTY COUNTY MANUAL CONTROL OF THE CONTROL WHITCH COUNTY COUNTY COUNTY COUNTY WHITCH COUNTY WHITC
			激活 Windo 转到"设置"以激起

01.02.13.041.3753

外箱/380x320x375mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NSDL-20-40K

NASCO GLOBAL نساسکو المالیس LED DOWN LIGHT		NASCO GLOBAL نساسکو العالیت LED DOWN LIGHT	
NASCO GLOBAL نصامكو المصاليمة	5 YEARS Warranty ضعان 5 سنوات	NASCO GLOBAL نصاسكو العماليسة	5 <u>YEARS</u> Warranty ضعان 5 سنوات
الموافق عن جور عن جور الموافق		الله الله الله الله الله الله الله الله	JAMES AND TON THE CAME OF THE
			激活 Wind 转到"设置"以

NASCO GLOBAL ناسکو العالمین LED DOWN LIGHT		NASCO GLOBAL أساسكو الصاليسة LED DOWN LIGHT	
NASCO GLOBAL نصاسكو العمالية	5 YEARS Warranty ضمان 5 سنوات	NASCO GLOBAL	5 YEARS Warranty ضمان 5 سنوات
المراف من دور بالمراف المراف	Section As Section 1000 Constant Consta	المالة على مود المالة	ABOUT A SHORT AND THE COMMON AND THE
			激活 Windo 转到"设置"以激制

• Attentions

- 1. Make sure the power is off before maintenance.
- 2. Clean the glass of diffuser of lamp regularly to maintain good light transmittance.
- 3. Clean the dust of the shell to maintain good heat dissipation performance.
- 4. Be careful not to use water or corrosive solution for cleaning, it is better to use a dry cloth.
- Warranty and After-sales Service

The period of guarantee is 5 years. Quality assurance is based on the correct storage, installation, use and maintenance of products. Due to improper installation

and improper use of the product, the product is damaged beyond the scope of this warranty. During the warranty period, We will choose to repair, replace (spare parts)

with new products. Labor charges or material costs will be appropriately collected over the warranty period.

Products Application Cases



The date listed in this file is for reference only, and the specific date should be subject to the specific products, if any change, sorry for no notice.