

PRODUCT SPECIFICATION

Product Name: LED Aircraft head-shaped wall light

Product model: NSOL-20W-WH NSOL-20W-NL NSOL-20W-WW

DESCRIPTION : LED Aircraft head-shaped wall light





- Features
- 1. With a PC, it looks good and looks high-end.
- 2. Built-in constant current driver for high efficiency and stability.
- 3. Imported SMD chip light source is adopted, with high light efficiency and long life.
- 4. Quick response time, the LED response time is nanosecond.
- 5. Environmental protection, no heavy metals and harmful gas.
- 6. Energy-saving, can save energy more 80% than traditional lights.
- 7 . No flicker, start quickly, soft light, protect your eyes.
- 8. Easy to install and use.


Technical Parameter	
Model	20W
LED model	SMD 2835
LED Qty	70 PCS
Power	20 W
Voltage	AC110-240V

Working Frequency	50/60HZ
Power Efficiency	≥85%
Luminous Flux	1700LM
Efficiency	85LM/W \pm 10%
Displacement Factor	≥ 0.7
Colour Temperature	WH: 6500K(6020-7040)
	NW: 4000K(3710-4260)
	WW: 3000K(2875-3215)
CRI	Ra ≥ 80
Bean Angle	130 <u>°</u>
Working Temperature	-20 to + 45 °C
Service life	30,000hr life 5yr warranty

• Relative Spectral Energy Distribution




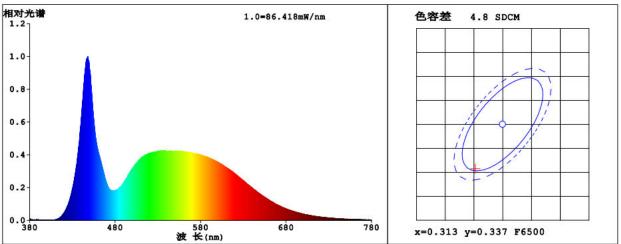


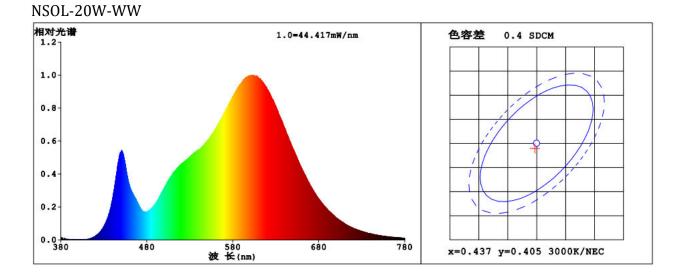

• Optical characteristic curve


NSOL-20W-WH NSOL-20W-NL NSOL-20W-WW

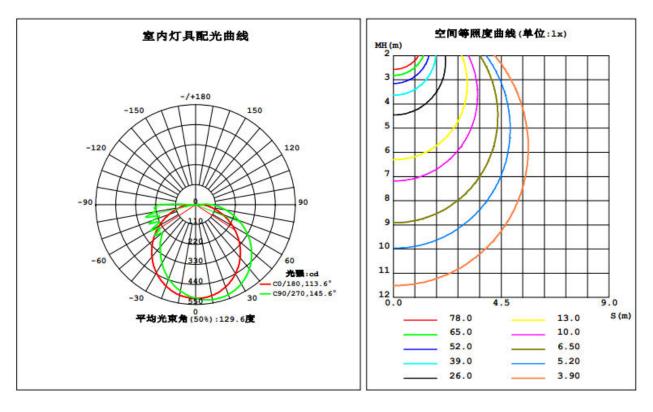

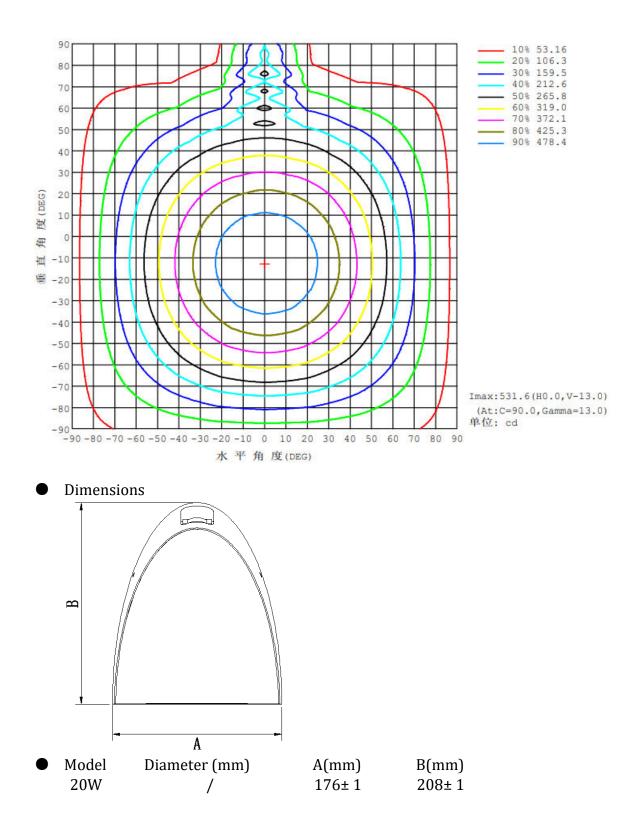




- Instruction of wiring
- 1. Diagram of power supply wiring :

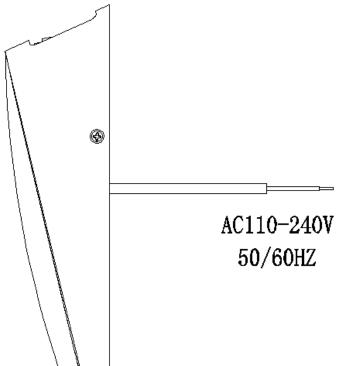

• Installation Instructions

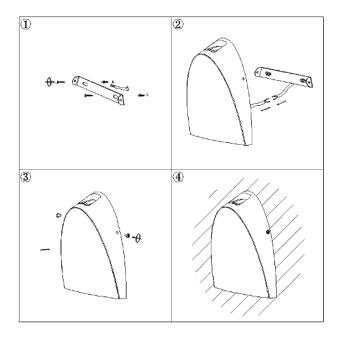

- 1. Fix the fixture with screw on ceiling;
- 2. Connect power and lamp;
- 3. Fix the lamp with fixture on ceiling by screw;
- 4. Finish installation and put the power on.
- Product Package

Packed in color box,40 PCS/ case



• Packing size & Pictures:

0			
Model	L (mm)	W (mm)	H (mm)
NSOL-20W-WH	182	67	215
NSOL-20W-NL	182	67	215
NSOL-20W-WW	182	67	215



内盒-182×67×215mm-250g灰底白+A5(120g芯) E坑-四色-覆光膜-20W-65K飞机灯



内盒-182×67×215mm-250g灰底白+A5(120g芯) E坑-四色-覆光膜-20W-30K飞机灯

01.02.13.041.4271 外稿-700×445×380mm-250g灰底白+535A(双120g芯) EB坑/四色-覆光膜-20W-65K飞机灯

NASCO GLOBAL ALLANI SCHLA		
entransister 2003 Sector 2003	resource of the second	
01.02.13.041.4270		

01.02.13.041.4270 外箱-700×445×380mm-250g灰底白+535A(双120g芯)EB坑/四色-覆光膜-20W-40K飞机灯

LED OVAL LIGHT	Image: Constraint of the second se	ended and the second se	Constraint of the second secon

01.02.13.041.4269 外稿-700×445×380mm-250g灰底白+535A(双120g芯) EB坑/四色-覆光膜-20W-30K飞机灯

LED OVAL LIGHT		LED OVAL LIGHT	
ted oval light	Exercise The Source Source The Source Source The Source Source Source The Source Source Source Source Source The Source Sou	encode 2009 A 2009 Kenter LED OVAL LIGHT	Constraint Constraint

Attentions

- 1. Make sure the power is off before maintenance.
- 2. Clean the glass of diffuser of lamp regularly to maintain good light

transmittance.

- 3. Clean the dust of the shell to maintain good heat dissipation performance.
- 4. Be careful not to use water or corrosive solution for cleaning, it is better

to use a dry cloth.

• Warranty and After-sales Service

The period of guarantee is 5 years. Quality assurance is based on the correct storage, installation, use and maintenance of products. Due to improper installation

and improper use of the product, the product is damaged beyond the scope of this warranty. During the warranty period, We will choose to repair, replace (spare parts)

with new products. Labor charges or material costs will be appropriately collected over the warranty period.

• Products Application Cases





The date listed in this file is for reference only, and the specific date should be subject to the specific products, if any change, sorry for no notice.