

PRODUCT SPECIFICATION

Product Name: LED Panel Light Product model: NS-20SF-R-65K NS-20SF-R-40K NS-20SF-R-30K DESCRIPTION: LED Panel Light




- Features
- 1. Using die-casting aluminum with good appearance for high class looking.
- 2. Built-in constant current driver for high efficiency and stability.
- 3. Imported SMD chip light source is adopted, with high light efficiency and long life.
- 4. Quick response time, the LED response time is nanosecond.
- 5. Environmental protection, no heavy metals and harmful gas.
- 6. Energy-saving, can save energy more 80% than traditional lights.
- 7 . No flicker, start quickly, soft light, protect your eyes.
- 8 . Easy to install and use.

Technical Parameter	
Model	NS-20SF-R
LED model	2835
LED Qty	120 PCS
Power	20W
Voltage	AC110-240 V


Working Frequency Power Efficiency	50/60HZ ≥ 80%	
Luminous Flux	1600LM	
Efficiency	80LM/W ±10%	
Power Factor	≥ 0.9	
Colour Temperature	WH: 6500K(6020-7040)	
	NW: 4000K(3710-4260)	
	WW: 3000K(2875-3215)	
CRI	Ra ≥ 80	
Bean Angle	120 <u>°</u>	
Working Temperature	-20 to + 50 °C	
Service life	30,000hr life 5yr warranty	

• Relative Spectral Energy Distribution




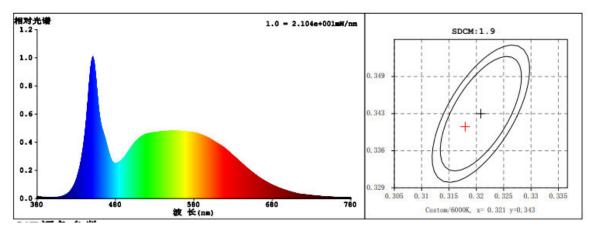

NS-20SF-R-40K

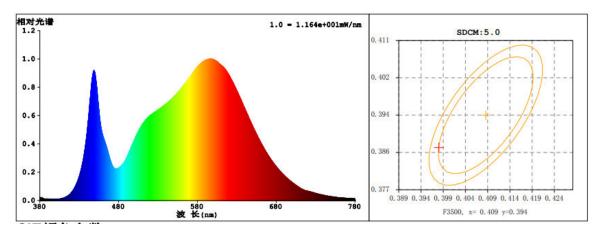


NS-20SF-R-30K

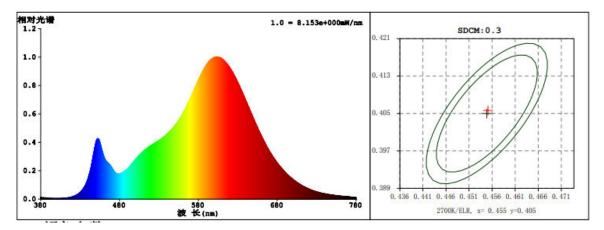



• Optical characteristic curve

NS-20SF-R

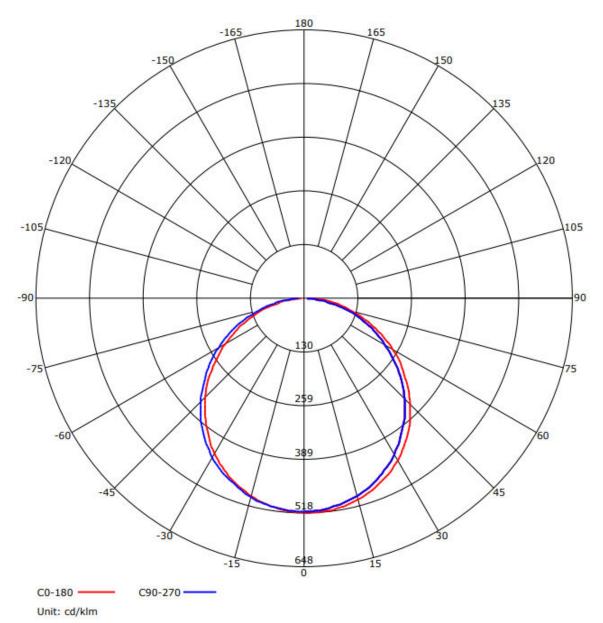


		/\\	
3.28ft	48.13, 48.17fc		10.04ft
1.00m	518.05 , 518.47lx		3.06m
6.56ft	12.03 , 12.04fc		20.07ft
2.00m	129.51 , 129.62lx		6.12m
9.84ft	5.35, 5.35fc		30.11ft
3.00m	57.56 , 57.61lx		9.18m
13.12ft	3.01, 3.01fc		40.14ft
4.00m	32.38 , 32.40lx		12.24m
16.40ft	1.93 , 1.93fc		50.18ft
5.00m	20.72 , 20.74lx		15.29m
19.69ft	1.34 , 1.34fc		60.21ft
6.00m	14.39 , 14.40lx		18.35m
0.000	14.39, 14.401		18.550
22.97ft	0.98, 0.98fc		70.25ft
7.00m	10.57 , 10.58lx		21.41m
26.25ft	0.75, 0.75fc		80.29ft
8.00m	8.09, 8.10lx		24.47m
29.53ft	0.59, 0.59fc		90.32ft
9.00m	6.40 , 6.40lx		27.53m
32.81ft	0.48 , 0.48fc		100.36ft
10.00m	5.18 , 5.18lx		30.59m
-0.0011	5110 / 511014		50.55

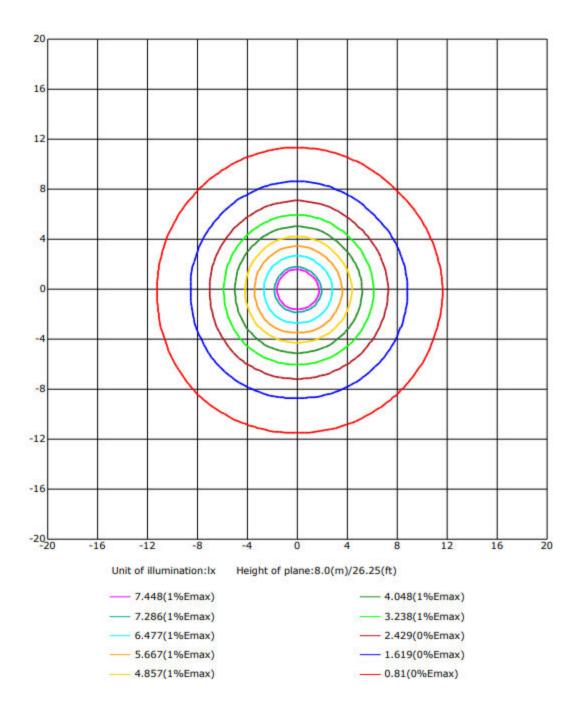


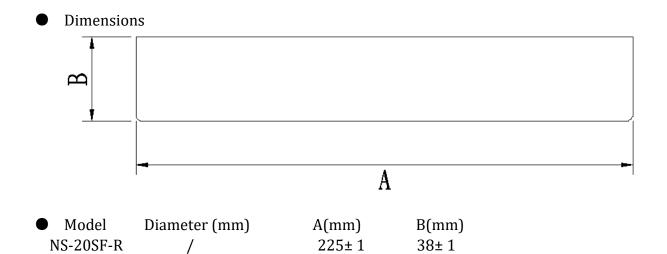

- Instruction of wiring
- 1. Diagram of power supply wiring :

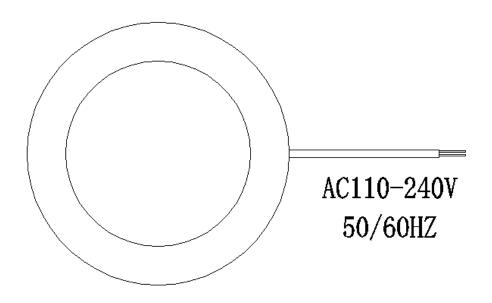

• Installation Instructions

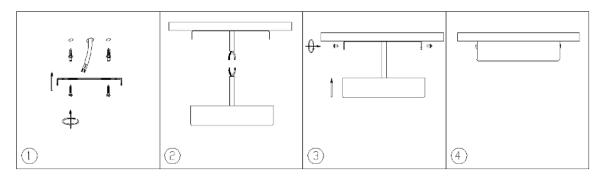

- 1. Fix the fixture with screw on ceiling;
- 2. Connect power and lamp;
- 3. Fix the lamp with fixture on ceiling by screw;
- 4. Finish installation and put the power on.

• Product Package

Packed in color box,20 PCS/ case



• Packing size & Pictures:

8			
Model	L (mm)	W (mm)	H (mm)
NS-20SF-R-65K	230	40	235
NS-20SF-R-40K	230	40	235
NS-20SF-R-30K	230	40	235







编码: 01.02.13.041.3369 NASCO GLOBAL LED panel Light LED panel Light NASCO GLOBAL NASCO GLOBAL 5 YEARS **asc** asc ضمان 5 سنو ات ضمان 5 سنو ات فحياة Life with Lishr. Dife u و رام البرديل ۲ الرات ۲ الرات ۲ الرن ۲ الرزن فلسلل ۱ الرزن فللر ۲ الرزن فللر رئم الدونين الارات الارت الارت الوزن الاسلى الوزن الاتر الدارن الاتر الدارن الاتر 1 🖳 🏲 🥰 11 👤 🏲 🥰 **20W 20W LED panel light** LED panel light MADE IN CHINA صنع في الصين MADE IN CHINA صنع في الصين

LED panel Light		LED panel Light	
NASCO GLOBAL نصاحکو العصالیت	5 YEARS Warranty طسان 5 سنوات	NASCO GLOBAL نساسكو العسالمية	5 YEARS Warranty مسان 5 سنوات
Le vet cier_	Jord J. NO.8076 NO.8076 NO.8076 Additional status <t< th=""><th>Level use</th><th>Jurit A. NOEL X0 No.2017 - 4-45 M. Val.Los AV.115447 M. Val.Los AV.115447 M. Color 6485 M. Color 6485 M. Color 6485 M. Color 6495 M. Color 6495 M.M. Color 6495 M.M. Color 6495 M.M. Color 6495</th></t<>	Level use	Jurit A. NOEL X0 No.2017 - 4-45 M. Val.Los AV.115447 M. Val.Los AV.115447 M. Color 6485 M. Color 6485 M. Color 6485 M. Color 6495 M. Color 6495 M.M. Color 6495 M.M. Color 6495 M.M. Color 6495
20W LED panel light	s ALEY VASHITLOHI MADE IN CHINA صلع في الصيون	20W LED panel light	د ALSTOSDOTOSTI MADE IN CHINA صنع في الصون

编码: 01.02.13.041.3423 外箱/ 480*225*490 mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NS-20SF-R-40K

编码: 01.02.13.041.3422 外箱/ 480*225*490 mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NS-20SF-R-30K

NASCO ولافكار المعالية LED panel Light		من م	
NASCO GLOBAL نساسکو المعالمیة	<mark>5 YEARS</mark> Warranty طبعان 5 منوات	NASCO GLOBAL	<mark>5 YEARS</mark> Warranty طسان 5 سنوات
- 35 to Rod Lie on Line	Junit No.000 No.0000 No.00000 No.00000 <td< th=""><th>- 26 up 4644</th><th>Juri J. Scient N. N. SIER-6-NE J. Scient N. N. SIER-6-NE J. Scient N. N. SIER-6-NE J. Scient N. Scient N. J. J. Sci</th></td<>	- 26 up 4644	Juri J. Scient N. N. SIER-6-NE J. Scient N. N. SIER-6-NE J. Scient N. N. SIER-6-NE J. Scient N. Scient N. J. J. Sci
20W LED panel light	د بالنظام بالنظ منابع في المساون	20W LED panel light	د المعنى الم

Attentions

- 1. Make sure the power is off before maintenance.
- 2. Clean the glass of diffuser of lamp regularly to maintain good light

transmittance.

- 3. Clean the dust of the shell to maintain good heat dissipation performance.
- 4. Be careful not to use water or corrosive solution for cleaning, it is better

to use a dry cloth.

•Warranty and After-sales Service


The period of guarantee is 5 years. Quality assurance is based on the correct storage, installation, use and maintenance of products. Due to improper installation

and improper use of the product, the product is damaged beyond the scope of this warranty. During the warranty period, We will choose to repair, replace (spare parts)

with new products. Labor charges or material costs will be appropriately collected over the warranty period.



Products Application Cases

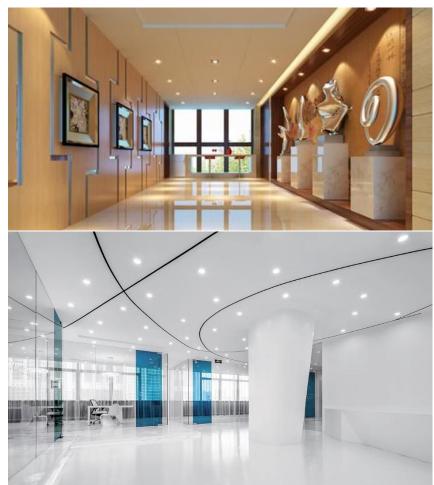

The date listed in this file is for reference only, and the specific date should be subject to the specific products, if any change, sorry for no notice.