

PRODUCT SPECIFICATION

Product Name: LED Panel Light Product model: NS-30SF-R-65K NS-30SF-R-40K NS-30SF-R-30K DESCRIPTION: LED Panel Light




- Features
- 1. Using die-casting aluminum with good appearance for high class looking.
- 2. Built-in constant current driver for high efficiency and stability.
- 3. Imported SMD chip light source is adopted, with high light efficiency and long life.
- 4. Quick response time, the LED response time is nanosecond.
- 5. Environmental protection, no heavy metals and harmful gas.
- 6. Energy-saving, can save energy more 80% than traditional lights.
- 7 . No flicker, start quickly, soft light, protect your eyes.
- 8 . Easy to install and use.


Technical Parameter	
Model	NS-30SF-R
LED model	2835
LED Qty	180 PCS
Power	30W
Voltage	AC110-240 V


Working Frequency Power Efficiency	50/60HZ ≥ 80%	
Luminous Flux	2400LM	
Efficiency	80LM/W ±10%	
Power Factor	≥ 0.9	
Colour Temperature	WH: 6500K(6020-7040)	
	NW: 4000K(3710-4260)	
	WW: 3000K(2875-3215)	
CRI	Ra ≥ 80	
Bean Angle	120 <u>°</u>	
Working Temperature	-20 to + 50 °C	
Service life	30,000hr life 5yr warranty	

• Relative Spectral Energy Distribution




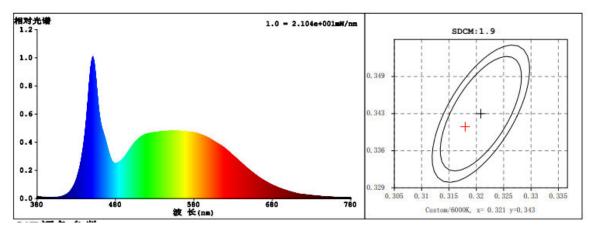



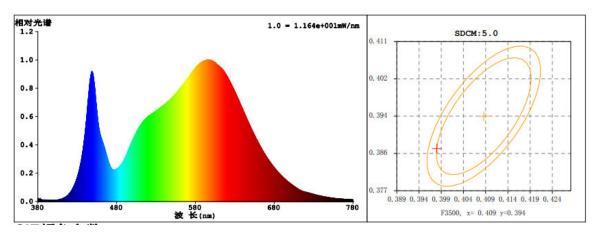


NS-30SF-R-30K

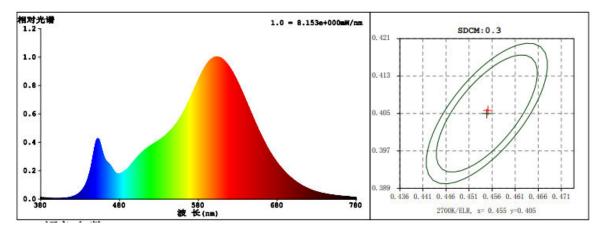



• Optical characteristic curve

NS-30SF-R

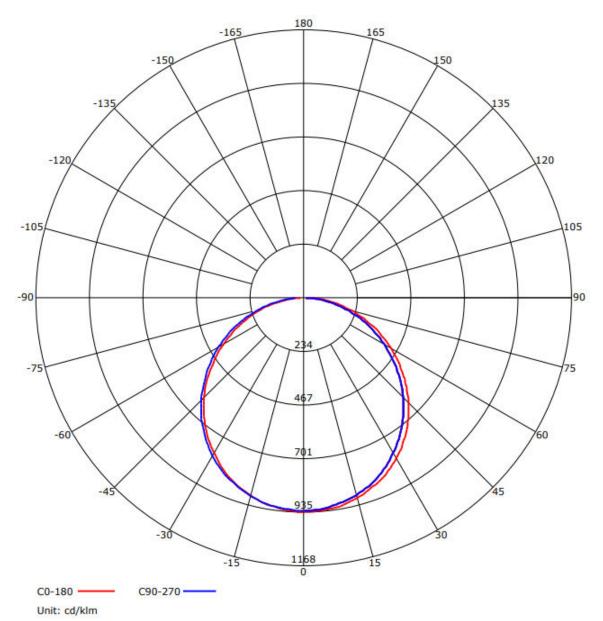


		/\	
3.28ft	86.74, 86.84fc	//\	10.05ft
1.00m	933.61 , 934.75lx		3.06m
1.00m	933.01 , 934.75IX		5.0011
6.56ft	21.68 , 21.71fc		20.09ft
2.00m	233.40 , 233.69lx		6.12m
9.84ft	9.64, 9.65fc		30.14ft
3.00m	103.73, 103.86lx		9.19m
13.12ft	5.42 , 5.43fc		40.18ft
4.00m	58.35 , 58.42lx		12.25m
16.40ft	3.47, 3.47fc		50.23ft
5.00m	37.34 , 37.39lx		15.31m
19.69ft	2.41 , 2.41fc		60.28ft
6.00m	25.93 , 25.97lx		18.37m
22.97ft	1.77 , 1.77fc		70.32ft
7.00m	19.05 , 19.08lx		21.43m
26.25ft	1.36 , 1.36fc		80.37ft
8.00m	14.59 , 14.61lx		24.50m
29.53ft	1.07, 1.07fc		90.42ft
9.00m	11.53 , 11.54lx		27.56m
32.81ft	0.87 , 0.87fc		100.46ft
10.00m	9.34 , 9.35lx		30.62m

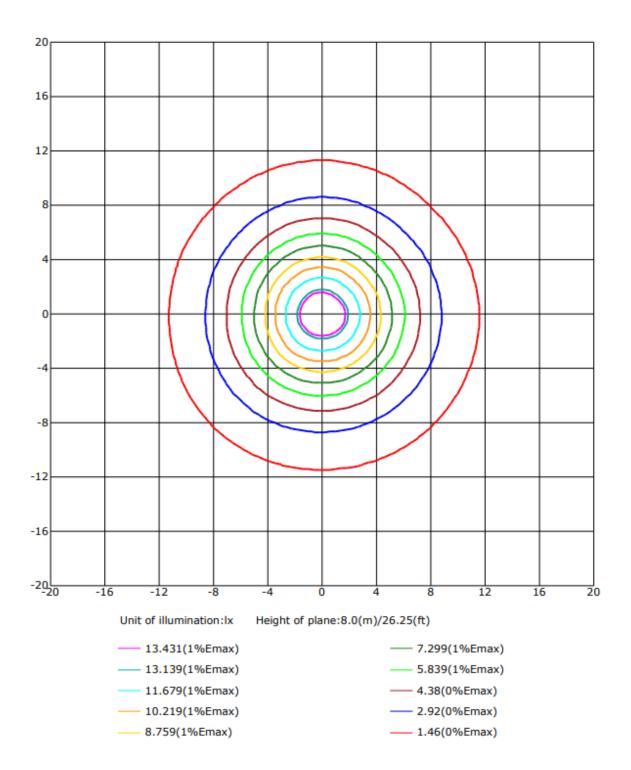


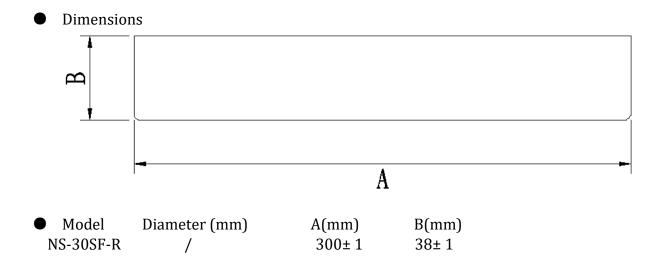

- Instruction of wiring
- 1. Diagram of power supply wiring :

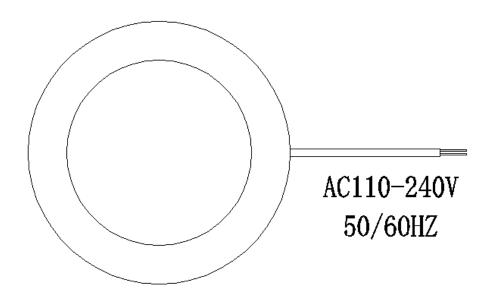

Installation Instructions

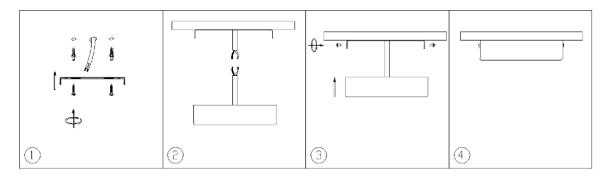

- 1. Fix the fixture with screw on ceiling;
- 2. Connect power and lamp;
- 3. Fix the lamp with fixture on ceiling by screw;
- 4. Finish installation and put the power on.

• Product Package

Packed in color box,20 PCS/ case



• Packing size & Pictures: H (mm) Model L (mm) W (mm) NS-30SF-R-65K 310 42 313 313 NS-30SF-R-40K 310 42 NS-30SF-R-30K 310 42 313



编码: 01.02.13.071.4584 内盒/310x42x313mm/250g灰底白+A2(100g芯) E坑/四色/覆光膜/NS-30SF-R-65K-V1


编码:01.02.13.071.4666 内盒/310x42x313mm/250g灰底白+A2(100g芯) E坑/四色/覆光膜/NS-30SF-R-40K





01.02.13.041.3370 外箱/435x325x635mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NS-30SF-R-65K

NASCO GLOBAL نامالی العالیہ LED panel Light		NASCO GLOBAL مستعلم العالمية LED panel Light	
	<mark>5 <u>YEARS</u> Warranty کو مناوات</mark>		<mark>5 YEARS</mark> Warranty منعان 5 سنوات
			シレック スリ、 MOREL NO NULLEGA シング NULLEGA ACELEA-ANY シング OTOCIN 30451 JALAJ XNI 11.14100 JALAJ XNI 11.14100
30W LED panel light	6 221102300132243 MADE IN CHINA صلح في الصنون	30W LED panel light	6 231033013234 MADE IN CHINA صلح فن المنزن

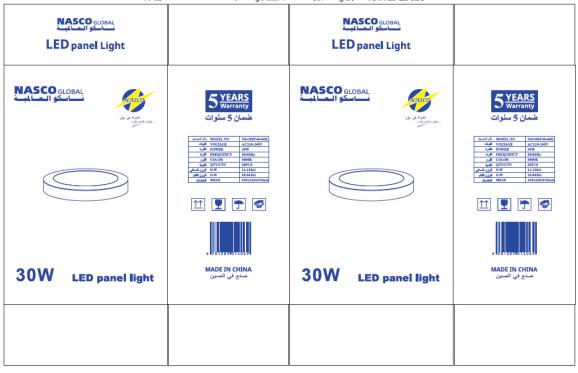

01.02.13.041.3425 外箱/435x325x635mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NS-30SF-R-40K

01.02.13.041.3424	外箱/435x325x635mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NS-30SF-R-30K		
NASCO GLOBAL العناية LED panel Light		NASCO GLOBAL العالية LED panel Light	
NASCO GLOBAL الساملي المسالية المعالية الملاء	5 YEARS Warranty ضعان 5 سنوات		5 YEARS Warranty ضنان 5 سنوات
	dupl d. Second volume Second volume upl d. Second volume Second volume upl relations Second volume Second volume		(a)c) 2 (3, 10000) 000000000000000000000000000000000000
30W LED panel light	د من معنی معنی معنی MADE IN CHINA صلع فی الصون	30W LED panel light	د الامتحادية MADE IN CHINA صلع في الصرين

Attentions

- 1. Make sure the power is off before maintenance.
- 2. Clean the glass of diffuser of lamp regularly to maintain good light

transmittance.

- 3. Clean the dust of the shell to maintain good heat dissipation performance.
- 4. Be careful not to use water or corrosive solution for cleaning, it is better

to use a dry cloth.

•Warranty and After-sales Service


The period of guarantee is 5 years. Quality assurance is based on the correct storage, installation, use and maintenance of products. Due to improper installation

and improper use of the product, the product is damaged beyond the scope of this warranty. During the warranty period, We will choose to repair, replace (spare parts)

with new products. Labor charges or material costs will be appropriately collected over the warranty period.



Products Application Cases

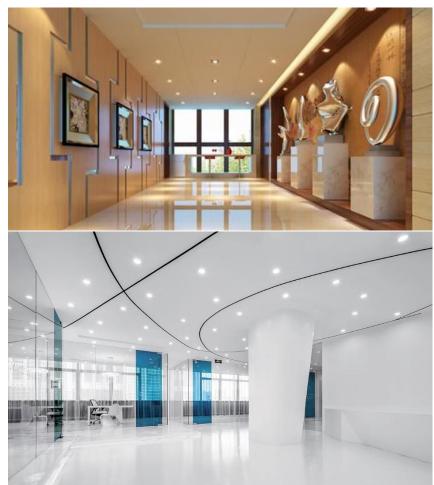

The date listed in this file is for reference only, and the specific date should be subject to the specific products, if any change, sorry for no notice.