

#### PRODUCT SPECIFICATION

Product Name: LED Panel Light

Product model: NS-5-S-65K NS-5-S-30K

DESCRIPTION: LED Panel Light

RoHS IECEE AC 110-240V Up to 30000hours

#### Features

- 1. Using die-casting aluminum with good appearance for high class looking.
- 2. Built-in constant current driver for high efficiency and stability.
- 3. Imported SMD chip light source is adopted, with high light efficiency and long life.
- 4. Quick response time, the LED response time is nanosecond.
- 5. Environmental protection, no heavy metals and harmful gas.
- 6. Energy-saving, can save energy more 80% than traditional lights.
- 7. No flicker, start quickly, soft light, protect your eyes.
- 8. Easy to install and use.

#### Technical Parameter

Model	NS-5-S
LED model	2835
LED Qty	36 PCS
Power	5W
Voltage	AC110-240 V

Working Frequency 50/60HZ

Power Efficiency ≥ 80%

Luminous Flux 330LM

Efficiency  $65 LM/W \pm 10\%$ 

Power Factor  $\geq 0.9$ 

Colour Temperature WH: 6500K(6020-7040)

WW: 3000K(2875-3215)

CRI Ra ≥ 80

Bean Angle 115º


Working  $-20 \text{ to} + 50 \,^{\circ}\text{C}$ 

Temperature


Service life 30,000hr life 5yr warranty

## Relative Spectral Energy Distribution

### NS-5-S-65K

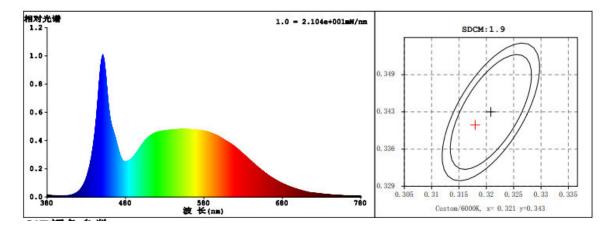



## NS-5-S-30K

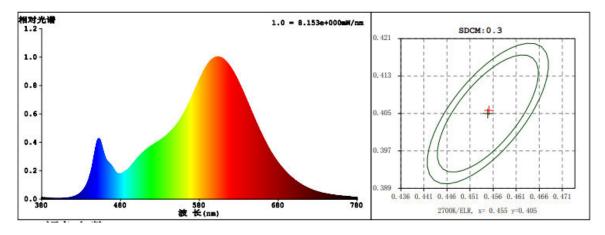


# • Optical characteristic curve


## NS-5-S

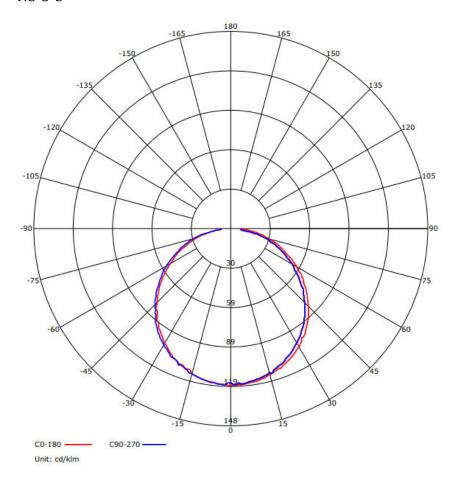

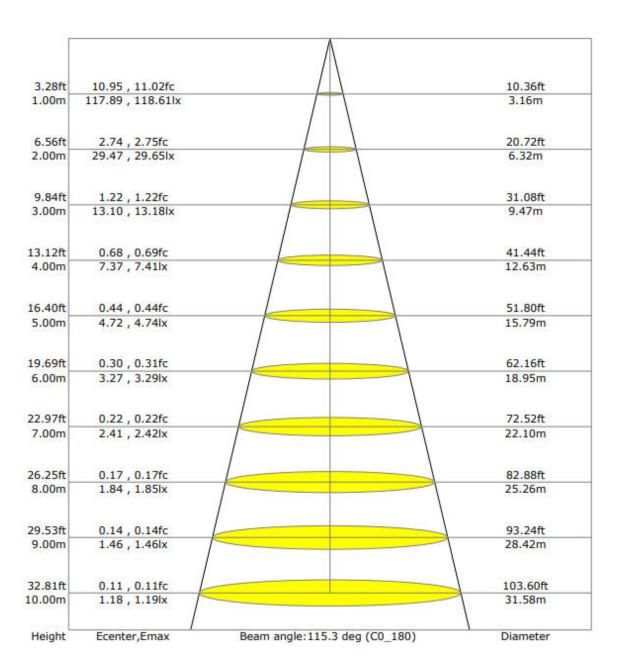


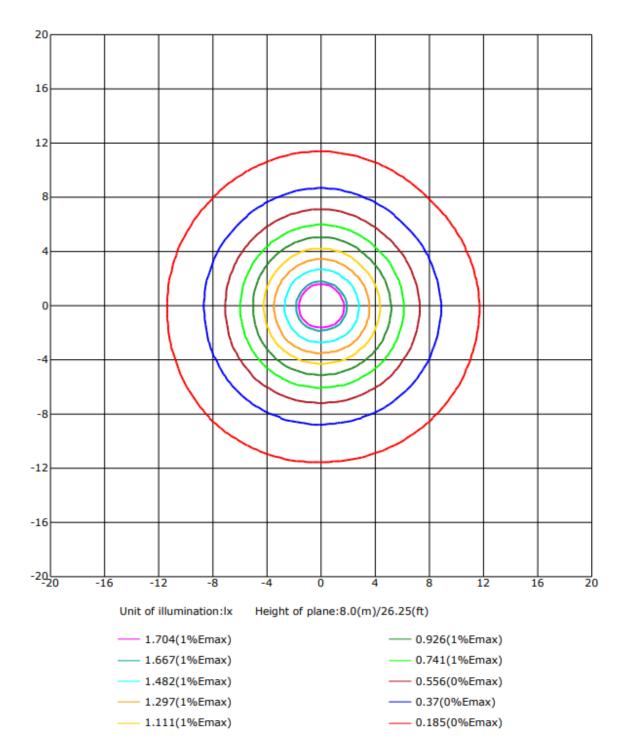

## Dimensions

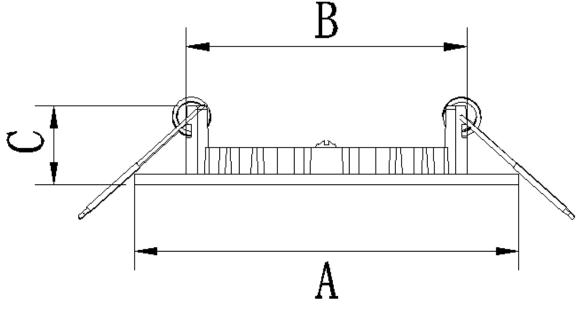

- Model Diameter (mm) A(mm) B(mm) C(mm)
   NS-5-S / 90±1 70±1 19±1
- Instruction of wiring
- 1. Diagram of power supply wiring:

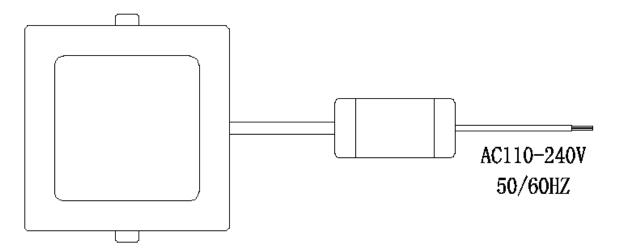

### Installation Instructions









- 1. Make a hole of the right size in the ceiling;
- 2. Connect power and lamp;
- 3. Attach the spring-loaded lamp to the ceiling;
- 4. Finish installation and put the power on.

## Product Package

Packed in color box,  $100 \, PCS/$  case

## Product Photo







## Packing size & Pictures:

Model	L (mm)	W (mm)	H (mm)
NS-5-S-65K	120	98	40
NS-5-S-30K	120	98	40

**编码: 01.02.13.071.4678** 内盒/ 120\*98\*40mm 250g灰底白+A2(100g芯) E坑/四色/覆光膜/NS-5-S-65K

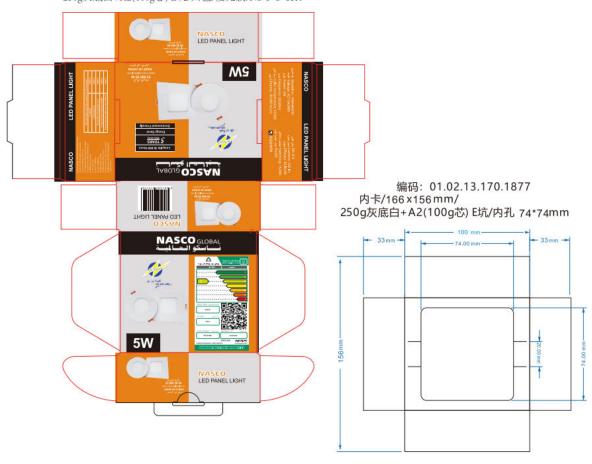

编码: 01.02.13.071.4677 内盒/120\*98\*40mm 250g灰底白+A2(100g芯) E坑/四色/覆光膜/NS-5-S-30K

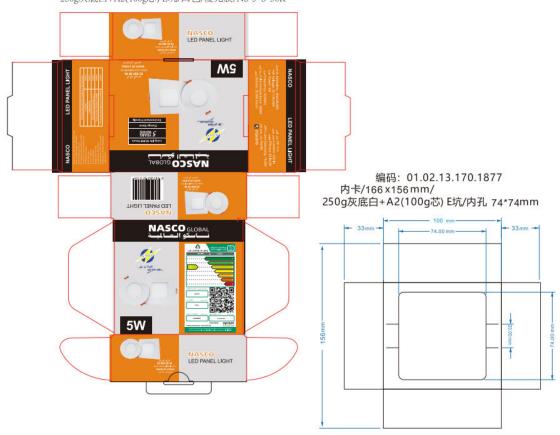

01.02.13.041.3508外箱/430x250x505mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NS-5-S-65K-V1

NASCO GLOBAL المساحق المصالية LED panel Light		NASCO GLOBAL نساسخو الصالية LED panel Light	
NASCO GLOBAL ناسکو العالمیة	<b>5 <u>YEARS</u></b> Warranty ضمان 5 سنوات	NASCO GLOBAL المحالية	5 YEARS Warranty ضعان 5 سنوات
Life vert Liant	Sept. of Section 50   No. S. L. A. M.	- Verili av vet	
5W LED panel light	a المعادلة	5W LED panel light	6 MADE IN CHINA  made in China  mus 60 libration
			激活人转到後

01.02.13.041.3507外箱/430x250x505mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NS-5-S-30K-V1

NASCO GLOBAL نصاحح الصالية LED panel Light		NASCO والمهامي المسالحي LED panel Light	
NASCO GLOBAL	5 <u>YEARS</u> Warranty ضمان 5 سنوات	NASCO GLOBAL	5 <u>YEARS</u> Warranty ضمان 5 سنوات
Copie on very Link		Litt will Lieft	System   S
5W LED panel light	والإعلاق المالية والمالية والم	5W LED panel light	و Patrostotatel MADE IN CHINA مستح في الصون
			激活 转到"8

#### • Attentions

- 1. Make sure the power is off before maintenance.
- 2. Clean the lamp diffuser regularly to maintain good light transmittance.
- 3. Clean the dust of the shell to maintain good heat dissipation performance.
- 4. Be careful not to use water or corrosive solution for cleaning, it is better to use a dry cloth.
- Warranty and After-sales Service

The period of guarantee is 5 years. Quality assurance is based on the correct storage, installation, use and maintenance of products. Due to improper installation

and improper use of the product, the product is damaged beyond the scope of this warranty. During the warranty period, We will choose to repair, replace (spare parts)

with new products. Labor charges or material costs will be appropriately collected over the warranty period.

# Products Application Cases



The date listed in this file is for reference only, and the specific date should be subject to the specific products, if any change, sorry for no notice.