

PRODUCT SPECIFICATION

Product Name: LED Panel Light

Product model: NS-8-R-65K NS-8-R-40K NS-8-R-30K

DESCRIPTION: LED Panel Light

RoHS IECEE AC 110-240V Up to 30000hours

Features

- 1. Using die-casting aluminum with good appearance for high class looking.
- 2. Built-in constant current driver for high efficiency and stability.
- 3. Imported SMD chip light source is adopted, with high light efficiency and long life.
- 4. Quick response time, the LED response time is nanosecond.
- 5. Environmental protection, no heavy metals and harmful gas.
- 6. Energy-saving, can save energy more 80% than traditional lights.
- 7. No flicker, start quickly, soft light, protect your eyes.
- 8. Easy to install and use.

Technical Parameter

Model	NS-8-R
LED model	2835
LED Qty	45 PCS
Power	8W
Voltage	AC110-240 V

Working Frequency 50/60HZ

Power Efficiency ≥ 80%

Luminous Flux 520LM

Efficiency $65 LM/W \pm 10\%$

Power Factor ≥ 0.9

Colour Temperature WH: 6500K(6020-7040)

NW: 4000K(3710-4260)

WW: 3000K(2875-3215)

CRI Ra ≥ 80

Bean Angle 120º


Working $-20 \text{ to} + 50 \,^{\circ}\text{C}$

Temperature


Service life 30,000hr life 5yr warranty

Relative Spectral Energy Distribution


NS-8-R-65K

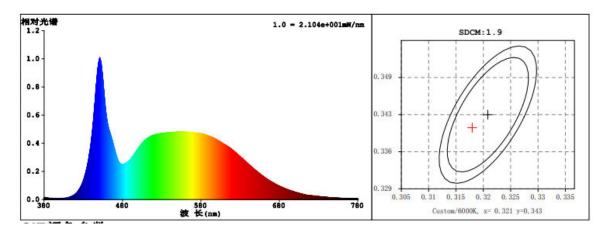

NS-8-R-40K

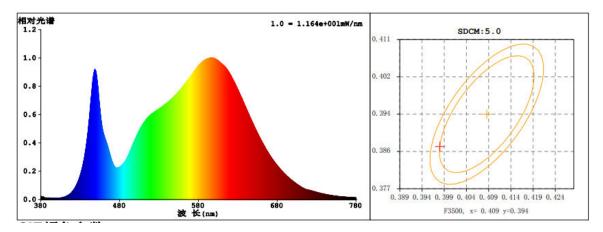



NS-8-R-30K

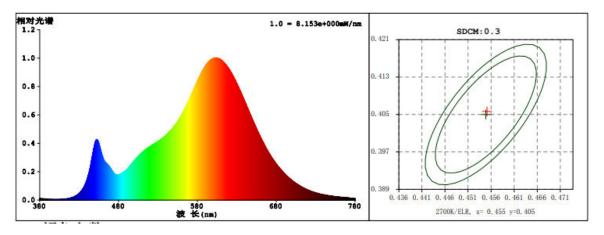


• Optical characteristic curve


NS-8-R

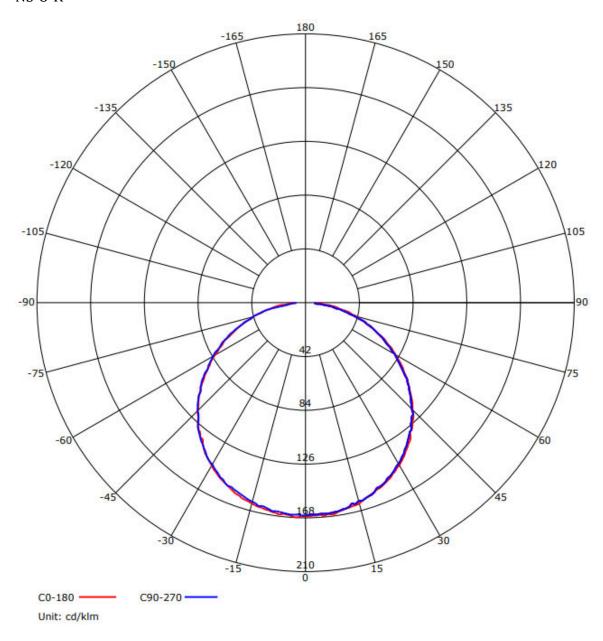

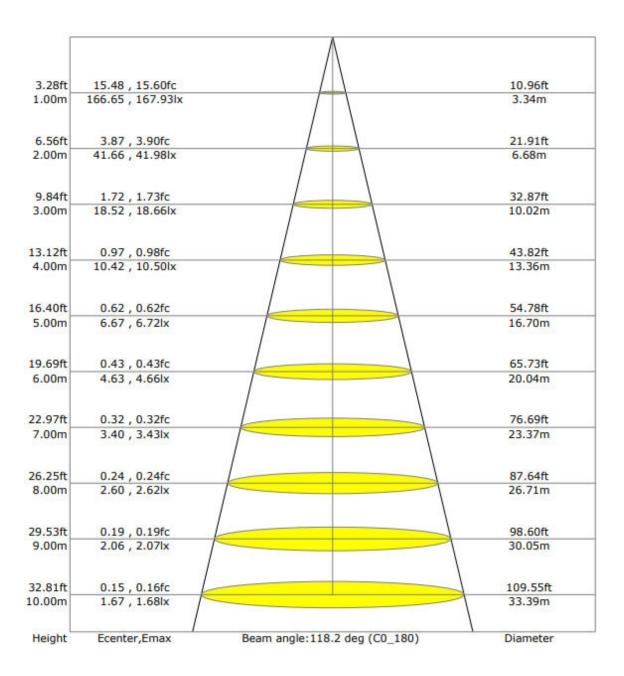


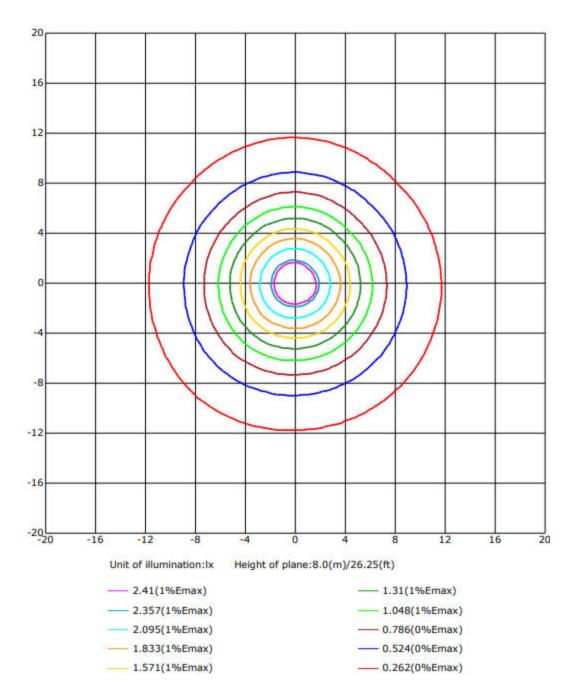

Dimensions

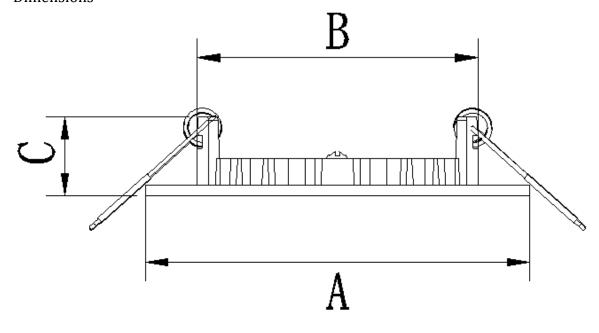

- Model Diameter (mm) A(mm) B(mm) C(mm)
 NS-8-R / 125±1 100±1 19±1
- Instruction of wiring
- 1. Diagram of power supply wiring:

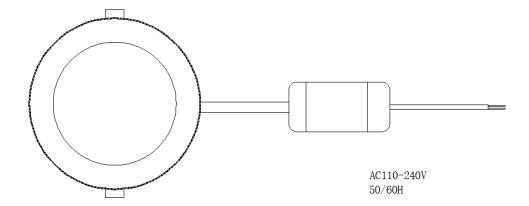

• Installation Instructions









- 1. Make a hole of the right size in the ceiling;
- 2. Connect power and lamp;
- 3. Attach the spring-loaded lamp to the ceiling;
- 4. Finish installation and put the power on.

Product Package

Packed in color box,60 PCS/ case

Product Photo





Packing size & Pictures:


Model	L (mm)	W (mm)	H (mm)
NS-8-R-65K	147	135	40
NS-8-R-40K	147	135	40
NS-8-R-30K	147	135	40

编码: 01.02.13.071.4579 内盒/147x135x40mm/





01.02.13.071.6637 内盒/147x135x40mm/250g灰底白+A2(100g芯) E坑/四色/覆光膜/NS-8-R-40K

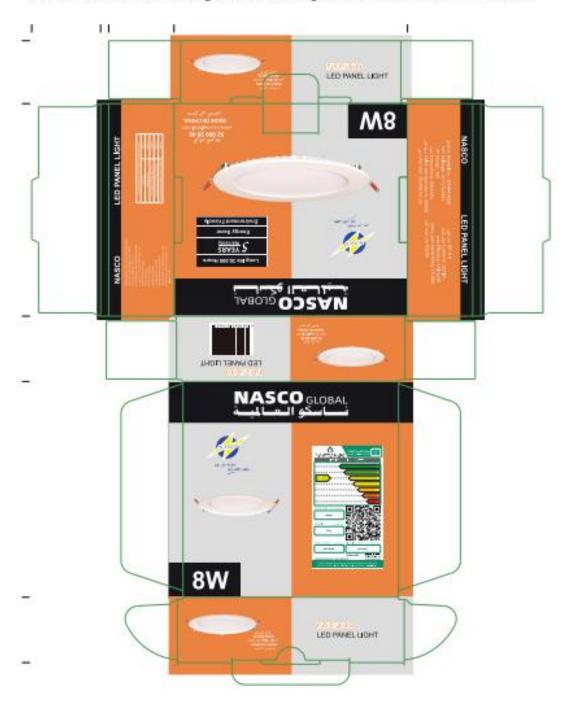

编码: 01.02.13.071.4658 内盒/147x135x40mm/ 250g灰底白+A2(100g芯) E坑/四色/覆光膜/NS-8-R-30K



01.02.13.041.3576外箱/455x210x545mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NS-8-R-65K-V1

NASCO GLOBAL نساسخو العبائية LED panel Light		NASCO GLOBAL ساستو العدالية LED panel Light	
NASCO GLOBAL THE STATE OF THE	5 <u>YEARS</u> Warranty ضمان 5 سنوات	NASCO GLOBAL مرابعة المعالمية المعا	5 <u>YEARS</u> Warranty ضمان 5 سنوات
	Section 2, MODEL NO No.50-6-65		June 20, 2000 200
8W LED panel light	والإغازة الإغازة و MADE IN CHINA نستع في الصين	8W LED panel light	(و و و و و و و و و و و و و و و و و و و
			激》活 转到"说

01.02.13.041.4739

外箱/455x210x545mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NS-8-R-40K

NASCO GLOBAL نساسخو العمالية LED panel Light		NASCO GLOBAL ساحکو الحساب LED panel Light	
NASCO GLOBAL غيالية سكو العالمية سودو من حور	5 YEARS Warranty ضمان 5 سنوات	NASCO GLOBAL غيادية المحاوات عرد	5 <u>YEARS</u> Warranty ضمان 5 سنوات
	Depth MODELL ND SN-0-8-disk		Journal A. MOREIL NO. SAN-BA-DER.
8W LED panel light	و Restossions المعاونة المعاو	8W LED panel light	d RESTORATIO (الأوقال المالية
			激活 (转到"设

01.02.13.041.3577 外箱/455x210x545mm/250g灰底白+535A(双120g芯) EB坑/四色/覆光膜/NS-8-R-30K-V1

NASCO GLOBAL المالحة المحالية LED panel Light		NASCO GLOBAL ساستو المسابد LED panel Light	
NASCO GLOBAL THE PROPERTY OF	5 <mark>YEARS</mark> Warranty ضمان 5 سنوات	NASCO GLOBAL Solventian Solventian	5 <u>YEARS</u> Warranty ضعان 5 سنوات
	June 1, MINIST NO		Second A. MIRELE NO. No.ed-Str.
8W LED panel light	MADE IN CHINA صنح في الصنون	8W LED panel light	a is iossioossos MADE IN CHINA صنع في الصون
			激活 V 转到"站

• Attentions


- 1. Make sure the power is off before maintenance.
- 2. Clean the glass of diffuser of lamp regularly to maintain good light transmittance.
- 3. Clean the dust of the shell to maintain good heat dissipation performance.
- 4. Be careful not to use water or corrosive solution for cleaning, it is better to use a dry cloth.
- Warranty and After-sales Service

The period of guarantee is 5 years. Quality assurance is based on the correct storage, installation, use and maintenance of products. Due to improper installation

and improper use of the product, the product is damaged beyond the scope of this warranty. During the warranty period, We will choose to repair, replace (spare parts)

with new products. Labor charges or material costs will be appropriately collected over the warranty period.

Products Application Cases

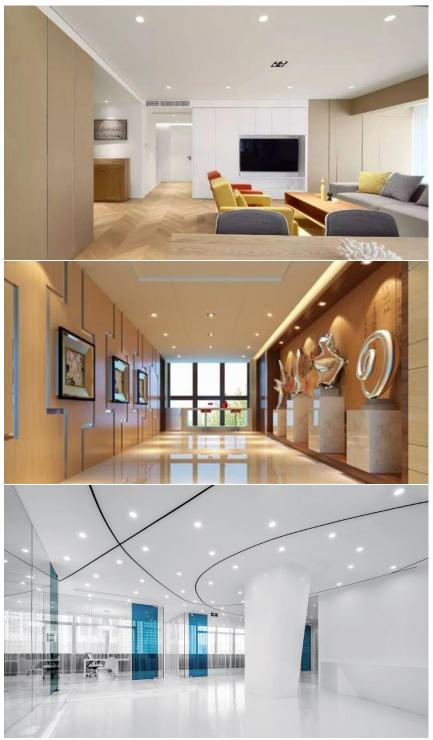

The date listed in this file is for reference only, and the specific date should be subject to the specific products, if any change, sorry for no notice.