



**NASCO**

## Floodlight200W Specification

File No: YZ/DJ-QT-2867  
Update Date 2025-02-27  
Revision :A/00

### 1.Features

- The structure of the heat sink is Aluminum
- **Using constant current power supply, safety, stability.**
- Semitransparent cover makes the light more evenly, soft

### 2.Technical Parameters

Specifications Parameters		
Model Number	NSFL-200W-WW	NSFL-200W- WH
Power	200W (±10%) AC230V 50/60HZ	
Input Voltage and Power Frequency and Input Current	AC 110-264V 50/60Hz 0.869A@230V	
Power Factor	≥0.9	
CCT	3045±175K	6530±510K
CRI	≥80	
Luminous efficiency	110LM/W (±10%)	120LM/W (±10%)
Colour	Housing: BLACK	
Semitransparent Cover Material	Tempering Glass	
Material of Heat sink	ALU+ Die-casting	
Certificate	/	
Dimmable	NO	
Beam Angle(±10%)	110°	
Ingress Protection	IP66	
Surge Protection	N-L 1KV N-PE/L-PE 2KV	
EMC	Y	



NASCO

Floodlight200W  
Specification

File No: YZ/DJ-QT-2867  
Update Date 2025-02-27  
Revision :A/00


3.Other Parameters

The technical parameter is only for reference, such as version or parameter change, without notice

Other Parameters	
Model Number	NSFL-200W-WW      NSFL-200W- WH
Operating Temperature	-20°C~40°C
Rated Life-span	30000HRS@25°C
Dimension	L341x W311 x H36±5mm
Packing Dimension	/
Pcs / Box	4pcs/box
Product Weight	1860g±10%
Accessories package	/
The rest	Power cable exposed length: <b>150 mm</b> ( 3×1.0 mm <sup>2</sup> multi-core round rubber cable; wire cores: L brown, N blue, PE green-yellow), Outer sheath stripping length: <b>60 mm</b> Inner insulation stripping length: <b>10 mm</b>

Product Picture

Photos are for reference only, in kind prevail

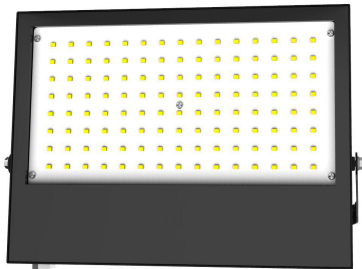

Distribution Curve Flux

